

B120i

BestPack™ Stretch Wrapper

Semi-automatic pallet wrapping machine w/ Touchscreen

The BestPack™ B120i Low Profile Semi-Automatic Stretch Wrapper offers an economical upgrade from manual hand wrapping, boosting efficiency while reducing operator fatigue.

Its modern HMI touchscreen control panel provides intuitive, easy operation with precise wrapping control. The clutch tension stretch system delivers consistent film application for secure load containment, while the Easy Film Feed design eliminates threading, making film changes fast and hassle-free.

CBM Systems BestPack™ Stretch Wrapper w/ Touchscreen



See what the B120i can do for you!

1. Increase film utilization up to 20% for instant cost savings.
2. Shorten wrapping cycle time to as little as 1½ to 2 minutes.¹
3. Upgrade from hand-wrap to machine film to get all the benefits!



Easy to learn controls

High resolution touchscreen display where you can adjust film tension, wrap settings, turntable and carriage speeds.



Plug and play—Start wrapping right away

Affix film to your pallet—then press start. In many cases, operators won't even need to adjust wrap settings between loads.



Improve load integrity and reduce shipping damage

Consistent performance and excellent load stability during transport keeps your load tightly secured more effectively than hand-wrapping.



Lower overall cost per load

Get the job done faster and waste less stretch wrap when switching to a BestPack™ stretch wrapper.

Contact us for more information


+1 (909) 670-8888 | sales@cbmsystem.com | www.cbmsystem.com

© 2025 CBM Systems, Inc. and BestPack Packaging Systems. All rights reserved. 251201

B120i Specifications

Performance	
Speed*	25-35 loads/hour
Turntable Speed	12 RPM (variable)
Load Capacity	4,000 lbs
Turntable Size	58" diam
Max. Load Size	53" L x 53" W
Max. Load Height	82" H
Turntable	3/8" laser-cut steel plate
Film Delivery	
Film Delivery System	Clutch tension
Film Stretch	Standalone Roller
Film Tension	Up to 120%
Film Capacity	10" diam x 20"W (30"W option)
Film Carriage Speed	Single
Height Sensor	Standard
Machine / Shipping Data	
Power Requirements	110V, 60 Hz, 8A
Pneumatic Requirements	None
Machine Dimensions	85" L x 59" W x 86" H
Weight (approximate)	750 lbs
Forklift Portable	Standard
Tilt-Down Tower	Standard

Machine Footprint

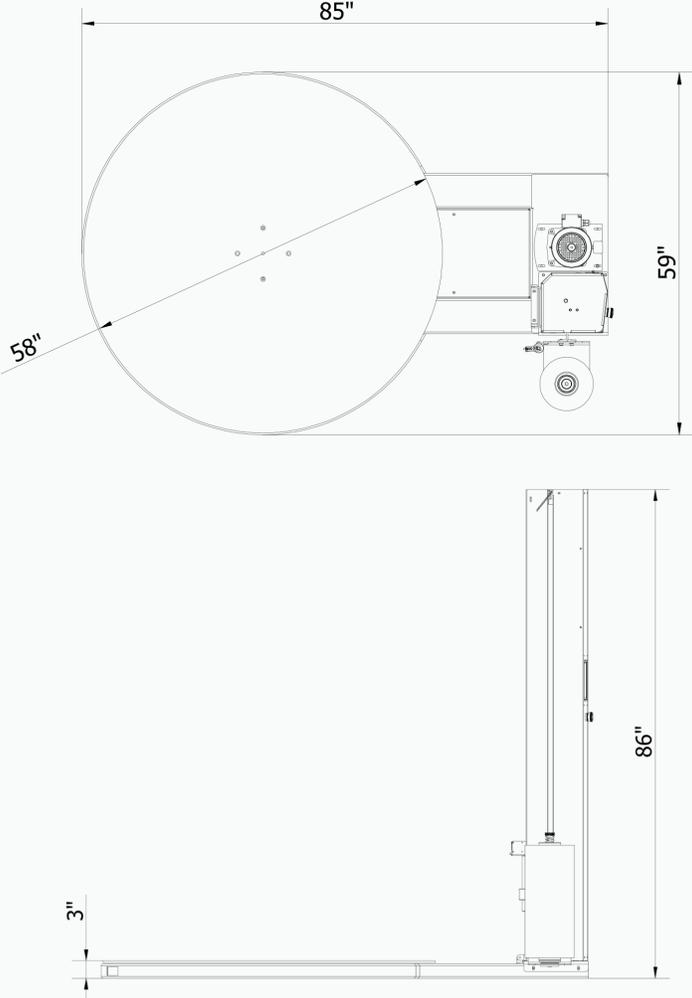


**Make wrapping as easy as 1...
2... 3...!**

Set down your pallet, hit start, and get wrapping!

- Detect your pallet load's height automatically.
- Reinforce the top and bottom of your load.
- Pre-stretch film up to 120%.
- Low maintenance...heavy-duty frame and roller support system.

Options to improve performance

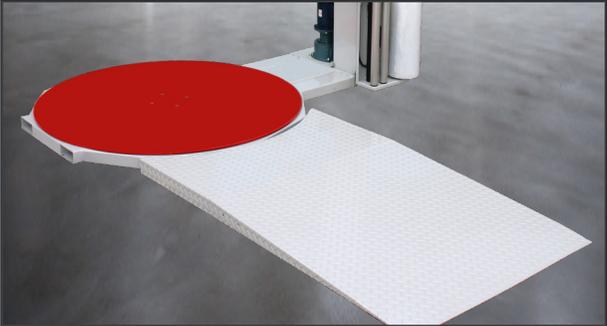

Loading Ramp

Load your machine with a pallet jack using the made-to-fit loading ramp.

Specifications subject to change without notice.
* Wrap speeds may vary depending on load configuration.

