

# B150i

## BestPack™ Stretch Wrapper

Semi-automatic pallet wrapping machine w/ Touchscreen

For growing operations seeking an affordable and reliable pallet wrapping solution, the BestPack™ B150i delivers performance at a breakthrough price. Built for high production speed and heavy-duty operation, the B150i ensures consistent, secure load containment while simplifying end-of-line packaging.

Its HMI touchscreen control panel provides intuitive operation, making training quick and production more efficient—an essential choice for operations ready to upgrade from manual wrapping.

CBM Systems BestPack™ Stretch Wrapper w/ Touchscreen



### See what the B150i can do for you!

1. Increase film utilization up to 50% for instant cost savings.
2. Shorten wrapping cycle time to as little as 1½ to 2 minutes.<sup>1</sup>
3. Upgrade from hand-wrap to machine film to get all the benefits!



#### Easy to learn controls

High resolution touchscreen display where you can adjust film tension, wrap settings, turntable and carriage speeds.



#### Plug and play—Start wrapping right away

Affix film to your pallet—then press start. In many cases, operators won't even need to adjust wrap settings between loads.



#### Improve load integrity and reduce shipping damage

Consistent performance and excellent load stability during transport keeps your load tightly secured more effectively than hand-wrapping.



#### Lower overall cost per load

Get the job done faster and waste less stretch wrap when switching to a BestPack™ stretch wrapper.

Contact us for more information


+1 (909) 670-8888 | [sales@cbmsystem.com](mailto:sales@cbmsystem.com) | [www.cbmsystem.com](http://www.cbmsystem.com)

© 2025 CBM Systems, Inc. and BestPack Packaging Systems. All rights reserved. 251201

## B150i Specifications

Performance	
Speed*	25-35 loads/hour
Turntable Speed	12 RPM (variable)
Load Capacity	4,000 lbs
Turntable Size	58" diam
Max. Load Size	53" L x 53" W
Max. Load Height	82" H
Turntable	3/8" laser-cut steel plate
Film Delivery	
Film Delivery System	Clutch tension
Film Stretch	Dual rollers
Film Tension	Up to 150%
Film Capacity	10" diam x 20"W (30"W option)
Film Carriage Speed	Adjustable
Height Sensor	Standard
Machine / Shipping Data	
Power Requirements	110V, 60 Hz, 8A
Pneumatic Requirements	None
Machine Dimensions	89" L x 59" W x 86" H
Weight (approximate)	750 lbs
Forklift Portable	Standard
Tilt-Down Tower	Standard

## Machine Footprint

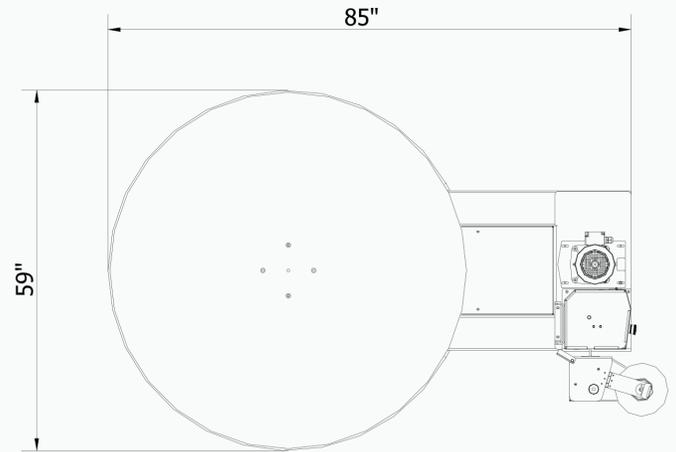

**Make wrapping as easy as 1... 2... 3...!**

*Set down your pallet, hit start, and get wrapping!*

- Detect your pallet load's height automatically.
- Reinforce the top and bottom of your load with extra wraps (combined setting 1-3).
- Pre-stretch film up to 150%.
- Low maintenance...heavy-duty frame and roller support system.


Specifications subject to change without notice.  
 \* Wrap speeds may vary depending on load configuration.

## Options to improve performance



### Integrated Scale

Weigh your loads directly on the B150i turntable. Verify shipping charges and protect against inventory shrinkage.

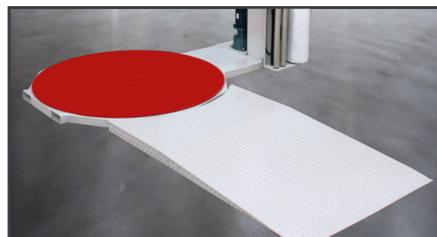

### Loading Ramp

Load your machine with a pallet jack using the made-to-fit loading ramp.



### Wrap Height Extension

Wrap tall loads with an extended wrap height column (16" increments) to accommodate your needs.



CBM Systems, Inc.  
 1599 Monte Vista Avenue  
 Claremont, CA 91711