

B200i

BestPack™ Stretch Wrapper

Semi-automatic pallet wrapping machine w/ Touchscreen

The BestPack™ B200i Low Profile Semi-Automatic Stretch Wrapper is a versatile mid-range solution designed for efficient pallet wrapping. With automatic load height sensing, it adapts to varying pallet sizes for consistent results and improved productivity.

Its Economy Carriage with Direct Film Access and roller ratio pre-stretch system maximize film efficiency, allowing more loads to be wrapped per roll. A modern HMI touchscreen control panel provides simple, intuitive control to streamline packaging operations.

CBM Systems BestPack™ Stretch Wrapper w/ Touchscreen



See what the B200i can do for you!

1. Increase film utilization up to 2x for instant cost savings.
2. Shorten wrapping cycle time to as little as 1½ to 2 minutes.¹
3. Upgrade from hand-wrap to machine film to get all the benefits!



Easy to learn controls

High resolution touchscreen display where you can adjust film tension, wrap settings, turntable and carriage speeds.



Plug and play—Start wrapping right away

Affix film to your pallet—then press start. In many cases, operators won't even need to adjust wrap settings between loads.



Improve load integrity and reduce shipping damage

Consistent performance and excellent load stability during transport keeps your load tightly secured more effectively than hand-wrapping.



Lower overall cost per load

Get the job done faster and waste less stretch wrap when switching to a BestPack™ stretch wrapper.

Contact us for more information


+1 (909) 670-8888 | sales@cbmsystem.com | www.cbmsystem.com

© 2025 CBM Systems, Inc. and BestPack Packaging Systems. All rights reserved. 251201

B200i Specifications

Performance	
Speed*	25-35 loads/hour
Turntable Speed	12 RPM (variable)
Load Capacity	4,000 lbs
Turntable Size	58" diam
Max. Load Size	53"L x 53"W
Max. Load Height	82"H
Turntable	3/8" laser-cut steel plate
Film Delivery	
Film Delivery System	Roller Ratio Pre-Stretch
Film Stretch	Dual rollers
Film Tension	Up to 200%
Film Capacity	10" diam x 20"W (30"W option)
Film Carriage Speed	Adjustable
Height Sensor	Standard
Machine / Shipping Data	
Power Requirements	110V, 60 Hz, 20 Amps
Pneumatic Requirements	None
Machine Dimensions	98"L x 59"W x 86"H
Weight (approximate)	900 lbs
Forklift Portable	Standard
Tilt-Down Tower	Standard

Machine Footprint

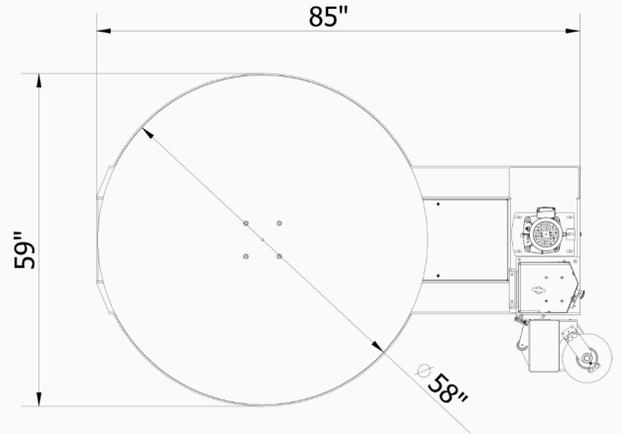

**Make wrapping as easy as 1...
2... 3...!**

Set down your pallet, hit start, and get wrapping!

- Detect your pallet load's height automatically.
- Reinforce the top and bottom of your load with extra wraps (combined setting 1-3).
- Pre-stretch film up to 200%.
- Low maintenance...heavy-duty frame and roller support system.


Specifications subject to change without notice.
* Wrap speeds may vary depending on load configuration.

Options to improve performance



Integrated Scale

Weigh your loads directly on the B200i turntable. Verify shipping charges and protect against inventory shrinkage.

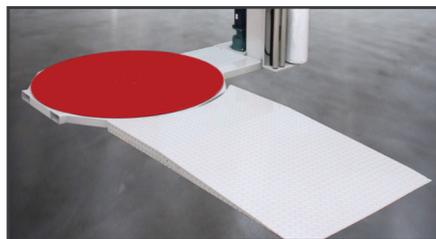

Loading Ramp

Load your machine with a pallet jack using the made-to-fit loading ramp.



Wrap Height Extension

Wrap tall loads with an extended wrap height column (16" increments) to accommodate your needs.



CBM Systems, Inc.
1599 Monte Vista Avenue
Claremont, CA 91711