

S300i

BestPack™ Stretch Wrapper

Semi-automatic pallet wrapping machine w/ Touchscreen

The BestPack™ S300i Low Profile Semi-Automatic Stretch Wrapper is a heavy-duty, top-of-the-line solution built for versatile pallet wrapping applications. A modern HMI touchscreen control panel provides intuitive operation and precise wrapping control.

With dual rubber rollers and a dedicated pre-stretch motor, the S300i maximizes film efficiency and increases loads wrapped per roll. Its user-friendly design simplifies training and helps improve packaging productivity.

CBM Systems BestPack™ Stretch Wrapper w/ Touchscreen



See what the S300i can do for you!

1. Increase film stretch up to 300% with motorized film pre-stretch.
2. Shorten wrapping cycle time to as little as 1 to 1½ minutes.¹
3. Upgrade from hand-wrap to machine film to get all the benefits!



Easy to learn controls

High resolution touchscreen display where you can adjust film tension, wrap settings, turntable and carriage speeds.



Plug and play—Start wrapping right away

Affix film to your pallet—then press start. In many cases, operators won't even need to adjust wrap settings between loads.



Improve load integrity and reduce shipping damage

Consistent performance and excellent load stability during transport keeps your load tightly secured more effectively than hand-wrapping.



Lower overall cost per load

Get the job done faster and waste less stretch wrap when switching to a BestPack™ stretch wrapper.

Contact us for more information


+1 (909) 670-8888 | sales@cbmsystem.com | www.cbmsystem.com

© 2025 CBM Systems, Inc. and BestPack Packaging Systems. All rights reserved. 251201

S300i Specifications

Performance	
Speed*	30-40 loads/hour
Turntable Speed	12 RPM (variable)
Load Capacity	5,000 lbs
Turntable Size	58" diam
Max. Load Size	53" L x 53" W
Max. Load Height	82" H
Turntable	3/8" laser-cut steel plate
Film Delivery	
Film Delivery System	Motorized with Corner Compensating Dancing Bar
Film Stretch	Motorized Dual Rubber Rollers
Film Tension	Up to 300%
Motor-Assist Film Dispenser	Standard
Film Capacity	10" diam x 20"W (30"W option)
Film Carriage Speed	Adjustable
Height Sensor	Standard
Machine / Shipping Data	
Power Requirements	110V, 60 Hz, 8A
Pneumatic Requirements	None
Machine Dimensions	89" L x 59" W x 86" H
Weight (approximate)	1,000 lbs
Forklift Portable	Standard
Tilt-Down Tower	Standard

Machine Footprint

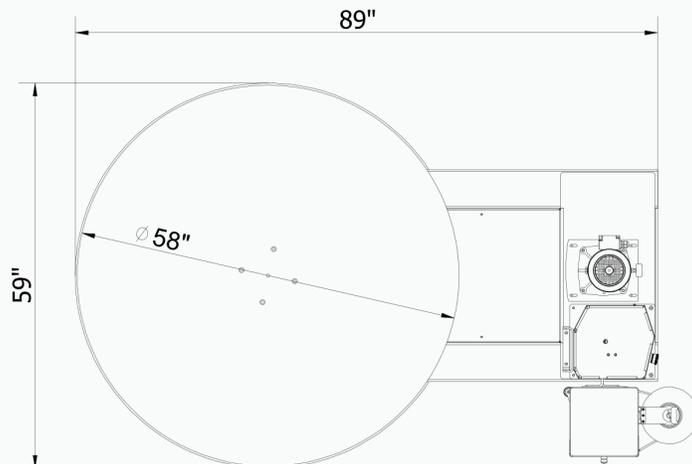

Make wrapping as easy as 1... 2... 3...!

Set down your pallet, hit start, and get wrapping!

- EASY LOAD film carriage and FILM FORCE release for easy pull at start of cycle
- Help prevent tears with smart corner compensating dancing bar
- Reinforce the top and bottom of your load with extra wraps (independent settings 0-9).
- Pre-stretch film up to 300%.
- Low maintenance...heavy-duty frame and roller support system.

Specifications subject to change without notice.


* Wrap speeds may vary depending on load configuration.

Options to improve performance



Integrated Scale

Weigh your loads directly on the S300i turntable. Verify shipping charges and protect against inventory shrinkage.

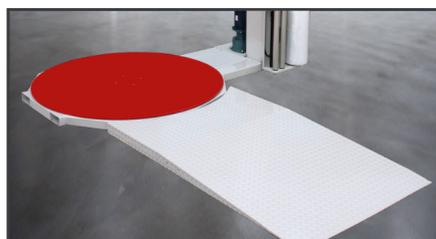

Loading Ramp

Load your machine with a pallet jack using the made-to-fit loading ramp.



Wrap Height Extension

Wrap tall loads with an extended wrap height column (16" increments) to accommodate your needs.



CBM Systems, Inc.
1599 Monte Vista Avenue
Claremont, CA 91711